


-
-
- 30°C (50°C)
- 120°C
- PN 16 / DIN 2401
-
-
-
-
-
-



- **123**
-
- DN 15 – 50
- DIN ISO 4064

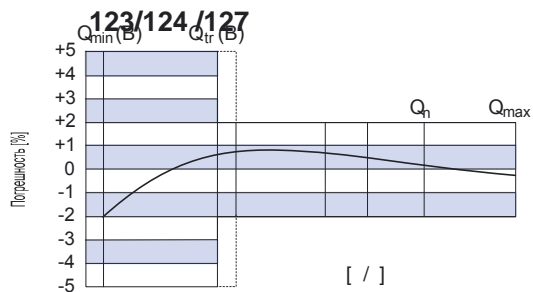

- **124/127**
- M-TSX
- M-TFX
-
- 3
- DN 20 – 40
- DIN 19648

